

202-33-ASM


High-frequency spindle
Manual tool change

Spindle for high-speed dressing



Technical specifications

- High precision steel ball bearings – 2 Pcs.
- Lifetime lubricated, maintenance free
- Motor: type 1
- Nominal output power: max. 0,17 kW
- Current voltage: max. 21 V
- Current: max. 7 A
- Frequency: max. 1000,0 Hz
- Motor poles: 1 pair
- Rotation speed: max. 60.000 rpm
- Motor protection: thermistor
- Speed monitoring: transmitter
- Sealing-air
- Housing diameter: 33 mm
- Cooling system: non cooling
- Tool change: manual tool change
- Coupler plug: 7-pole plastics with cable 3m
- Weight: 0,65 Kg

Dimensions

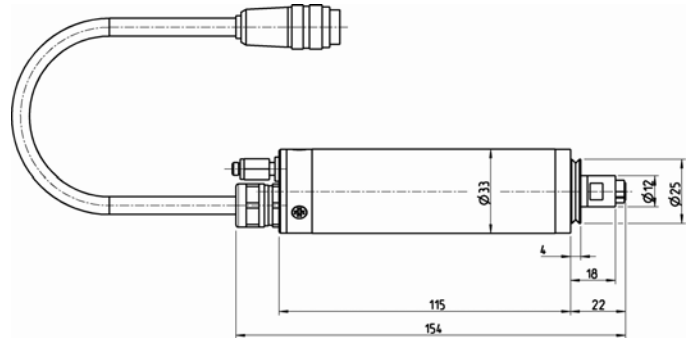

Power-, torque- and speed diagram

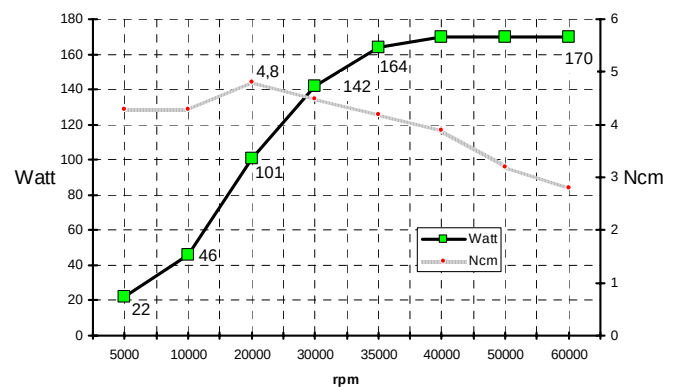

BMR GmbH • elektrischer & elektronischer Gerätebau
Unterreichenbacher Straße 1 • D-90455 Nürnberg-Katzwang
Tel. +49 (0)9122-631480 • Fax + 49 (0)9122-6314829
info@bmr-gmbh.de www.bmr-gmbh.de